


PREMIER



SURFACE MOUNTING

- Self-locking or reversible electromechanical operators suitable for gates installed on large posts
- With strong, articulated, galvanized steel anti-shearing arm
- Only one version for right/left hand side installations
- Equipped with limit switches in opening and closing



24 Vdc

- 24Vdc Self-locking electromechanical operator suitable for gates installed on large posts
- Amperometric anticrushing control

DU.E2 arm not included

					HEADY
					BRAINY
					BRAINY24



Unlock device by means of a personalized key



Equipped with limit switches in opening and closing



Prepared for battery back-up system

NOTES:

.....

.....

.....

.....

.....

PREMIER:


GUIDE FOR CHOOSING

Choose the weight and the length in the chart and find out the most suitable model.




leaf max weight

gate length	leaf max weight								
	170 kg	200 kg	250 kg	280 kg	300 kg	350 kg	400 kg	500 kg	600 kg
1 m	BEN	BEN	BEN	PR.45E MBE24	PR.45E MBE24	PR.45E MBE24	PR.45E PR.45ER PR.45E24	PR.45E PR.45E24	PR.45E PR.45E24
1,5 m	BEN	BEN	PR.45E MBE24	PR.45E MBE24	PR.45E MBE24	PR.45E MBE24	PR.45E PR.45ER PR.45E24	PR.45E PR.45E24	PR.45E PR.45E24
1,8 m	BEN	PR.45E MBE24	PR.45E MBE24	PR.45E MBE24	PR.45E MBE24	PR.45E MBE24	PR.45E PR.45ER PR.45E24	PR.45E PR.45E24	PR.45E PR.45E24
2,1 m	PR.45E PR.45ER MBE24	PR.45E PR.45ER MBE24	PR.45E PR.45ER MBE24	PR.45E PR.45ER MBE24	PR.45E PR.45ER PR.45EL MBE24	PR.45EL PR.45E PR.45ER PR.45E24	PR.45EL PR.45E PR.45ER PR.45E24	PR.45EL PR.45E PR.45E24	PR.45EL PR.45E PR.45E24
2,5 m	PR.45E MBE24	PR.45E MBE24	PR.45E MBE24	PR.45E MBE24	PR.45E PR.45E PR.45E24	PR.45EL PR.45E PR.45E24	PR.45EL PR.45E PR.45E24	PR.45EL PR.45E PR.45E24	PR.45EL
3 m	PR.45E PR.45E24	PR.45E PR.45E24	PR.45E PR.45E24	PR.45E PR.45E24	PR.45E PR.45E PR.45E24	PR.45EL PR.45E PR.45E24	PR.45EL PR.45E PR.45E24	PR.45EL	
3,5 m	PR.45EL	PR.45EL	PR.45EL	PR.45EL	PR.45EL	PR.45EL	PR.45EL		
4 m	PR.45EL	PR.45EL	PR.45EL	PR.45EL	PR.45EL				

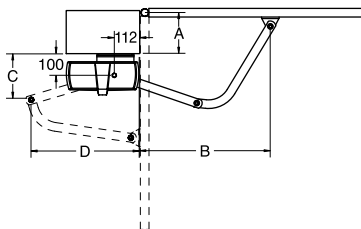

A	B	C	D
50	883	277	429
150	851	181	466
200	828	117	475
250	800	32	469
300	846	28	468

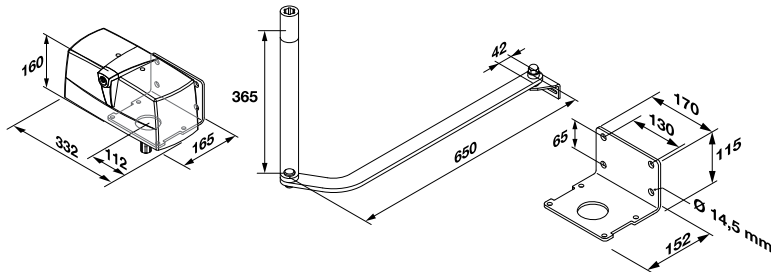

INSTALLATION LIMITS PR.45E

LEAF DIMENSION	MAX. WEIGHT
2,1 m	600 kg
2,5 m	500 kg
3,0 m	400 kg

INSTALLATION LIMITS PR.45ER

LEAF DIMENSION	MAX. WEIGHT
2,1 m	400 kg

INSTALLATION LIMITS PR.45EL

LEAF DIMENSION	MAX. WEIGHT
2,1 m	600 kg
2,5 m	600 kg
3,0 m	500 kg
3,5 m *	400 kg
4,0 m *	300 kg

INSTALLATION LIMITS PR.45E24

LEAF DIMENSION	MAX. WEIGHT
2,1 m	600 kg
2,5 m	500 kg
3,0 m	400 kg

* For leaves longer than 3,5 m we advise to install an electric lock

SETS AVAILABLE

- KPR 12 Sets per pallet
- KPR.24 12 Sets per pallet



TECHNICAL DATA

	PR.45E	PR.45EL	PR.45ER	PR.45E24
Power supply	230 Vac	230 Vac	230 Vac	230 Vac
Motor supply	230 Vac	230 Vac	230 Vac	24 Vdc
Max. absorbed current	1,75 A	1,45 A	1,75 A	9 A
Torque	325 Nm	300 Nm	250 Nm	320 Nm
Opening time	13"	20"	7"	9"
Operation cycle	30%	30%	40%	intensive use
Protection level	IP 44	IP 44	IP 44	IP 44
Operating temp.	-20°C /+50°C	-20°C /+50°C	-20°C /+50°C	-20°C /+50°C
Leaf max dimension	3 m	4 m	2,1 m	3 m
Weight	13 Kg	13 Kg	13 Kg	13 Kg
Reversible	No	No	Yes	No
Items no. per pallet	68	68	68	68